

Push-Button T 25




The T 25 push-button series covers a large area uses, as an aesthetic short range push-button. The compact control device possesses a deeply engraved stainless steel button plate as a standard offering and it is both resistant to vandalism and durable. Push-button plates are also

available in other materials. The command acknowledgment occurs by way of an area illuminated by an LED. The push-button is available in both square and round shapes as well in the colors of red, green, and blue to indicate call acknowledgement. The assembly occurs comfortably by way of two


threaded bolts, welded to the back of the fixture. The signal connection and voltage supply can either be through MicroMaTch cable (plug-in) or screw-in connectors. The T 25 can be perfectly integrated with the modules of the Kollmorgen Shaft Bus into the landing fixtures.

Drawings & Dimensions

T 25 square

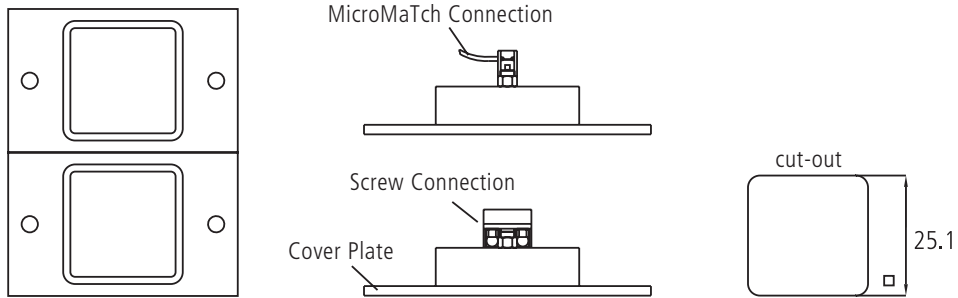

T 25 round

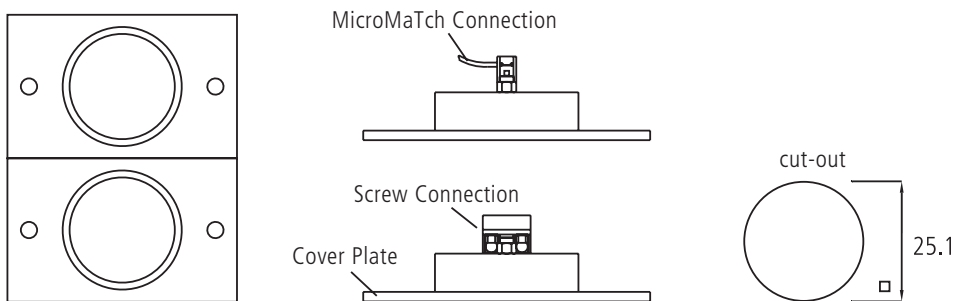

Design	Short range push-button (1 mm range)
Shape	Square / Round
Push Plate	25 mm diameter
Colour	red (standard) / blue / green
Connector	Screw Connection / MicroMaTch (plug-in)
Excitation	Common cathode / anode
Voltage	12 volts / 24 volts (standard)
Assembly	Compact, rear-side bolt assembly