
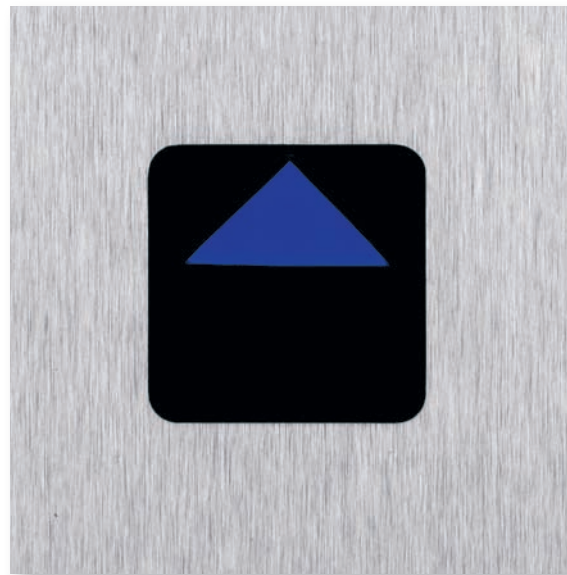


Directional Arrows




LED 711 / 712

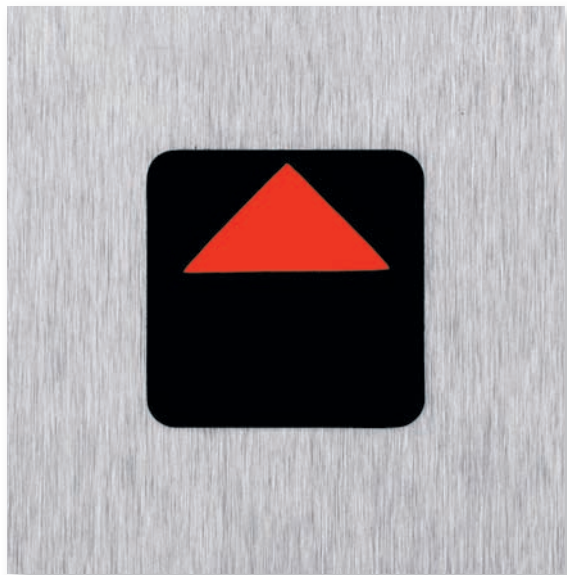

Our LED 711 and LED 712 directional arrow modules offer a fitting product solution for indicating the current direction of travel, as well as showing the intended future direction of travel. The modules are particularly small, and thus are even suitable for use in very narrow door spaces. The display is available both in red and in blue.

Technology	LED
Arrow - Width / Height	20 mm x 10 mm (per arrow)
Display - Width / Height	22 mm x 22 mm (per arrow)
Character Color	red (LED 711); blue (LED 712)
Connections	500 (ground), D9 (UP directional arrow), D10 (DOWN directional arrow)
Input Voltage [V DC]	min. / typ. / max. 17 / 24 / 28
Input Current [mA]	min. / typ. / max. 4 / 6 / 7

Drawings and Dimensions

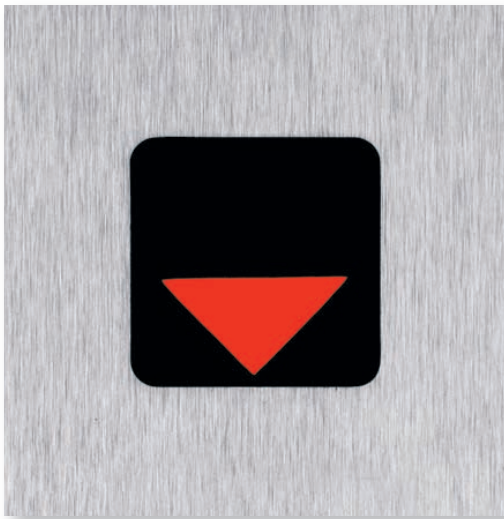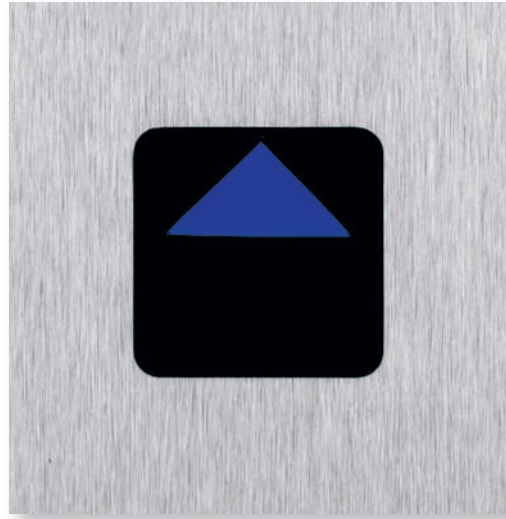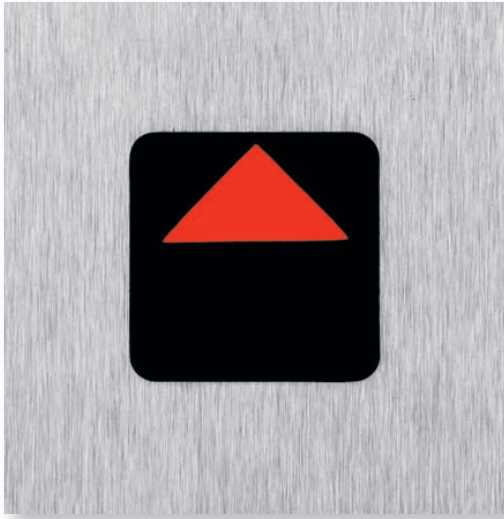

LED 711

LED 712

